


Thermoplastic tubing

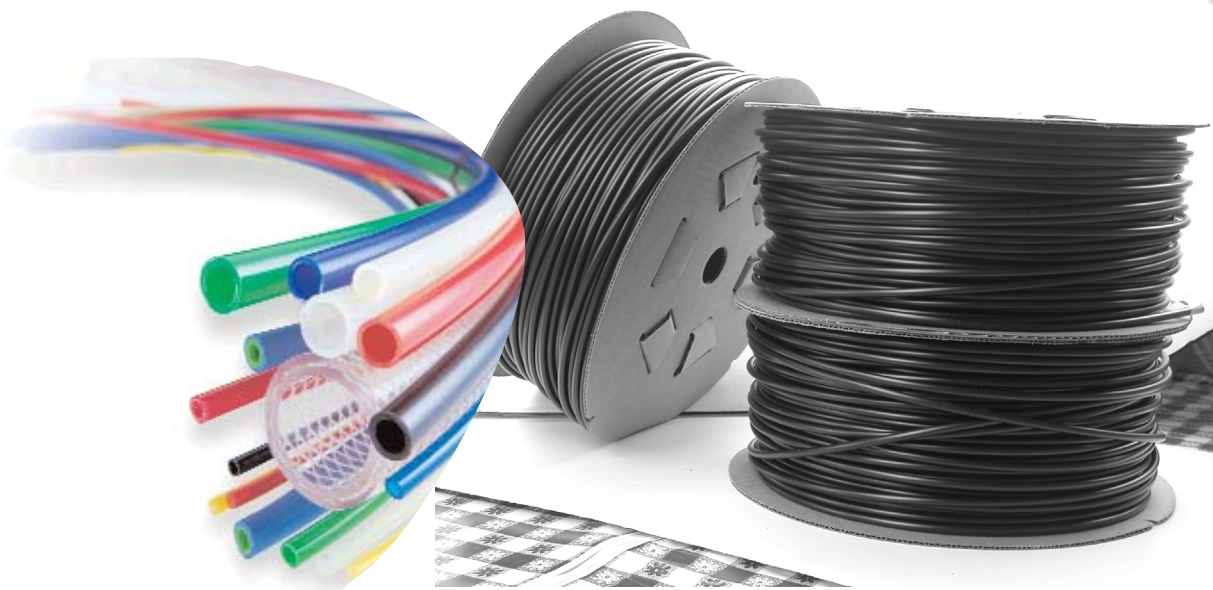

POLYURETHANE TUBING – Soft and flexible , it is suitable for low pressure pneumatic applications Standard Hardness 98 shore A . 10BAR maximum working pressure (in function of the diameter) .

POLYETHYLENE TUBING – Low density polyethylene tubing has a wide range of uses in pneumatic Lines , instrumentation systems and water lines . Natural color supplied as std . Black is recommended to improve durability in sunlight (ultraviolet radiation) .

NYLON 11 TUBING – Nylon 11 tubing is widely used in instrumentation lines , lubrication and process piping systems , fuel , oil and refrigerant lines . Natural color supplied as std . Black is recommended to improve durability in sunlight (ultraviolet radiation) .

| TPU | POLYURETANE TUBING (-40°C/+60°C) | | | Metric |
|-------------|----------------------------------|------|-------|--------|
| PART NUMBER | COIL LENGHT | O.D. | WALL | |
| TPUM2-1BN | 100MT | 2mm | 0.5mm | |
| TPUM4-2BN | 100MT | 4mm | 1mm | |
| TPUM5-3BN | 100MT | 5mm | 1.5mm | |
| TPUM6-4BN | 100MT | 6mm | 1mm | |
| TPEM8-5BN | 100MT | 8mm | 1mm | |
| TPUM10-8BN | 100MT | 10mm | 1mm | |

TPE POLYETHYLENE TUBING(-10°C/+60°C) Imperial

| PART NUMBER | COIL LENGHT | O.D. | WALL |
|-------------|-------------|---------------|--------|
| TPE0402BN | 100MT | 1/4"(6.35mm) | 1.02mm |
| TPE0503BN | 100MT | 5/16"(7.94mm) | 1.57mm |
| TPE0604BN | 100MT | 3/8"(9.53mm) | 1.57mm |
| TPE0806BN | 100MT | 1/2"(12.7mm) | 1.57mm |

TPE POLYETHYLENE TUBING(-10°C/+60°C) Metric

| PART NUMBER | COIL LENGHT | O.D. | WALL |
|-------------|-------------|------|------|
| TPEM4-2BN | 100MT | 4mm | 1mm |
| TPEM6-4BN | 100MT | 6mm | 1mm |
| TPEM8-6BN | 100MT | 8mm | 1mm |
| TPEM10-8BN | 100MT | 10mm | 1mm |
| TPEM12-10BN | 100MT | 12mm | 1mm |

Above part numbers are supplied as natural (white) . Additional colors are available by substituting the suffix BN with the suffix of a required color . Black(NE) Green(VE) Yellow (GL) Blue (BL)

TN1 NYLON 11 TUBING (-40°C/+80°C) Imperial

| PART NUMBER | COIL LENGHT | O.D. | WALL |
|-------------|-------------|---------------|--------|
| TN10402BN | 100MT | 1/4"(6.35mm) | 0.89mm |
| TN10503BN | 100MT | 5/16"(7.94mm) | 1.27mm |
| TN10604BN | 100MT | 3/8"(9.53mm) | 1.27mm |
| TN10806BN | 100MT | 1/2"(12.7mm) | 1.57mm |

TN1 NYLON 11 TUBING (-40°C/+80°C) Metric

| PART NUMBER | COIL LENGHT | O.D. | WALL |
|-------------|-------------|------|------|
| TN1M4-2BN | 100MT | 4mm | 1mm |
| TN1M5-3BN | 100MT | 5mm | 1mm |
| TN1M6-4BC | 100MT | 6mm | 1mm |
| TN10604BN | 100MT | 8mm | 1mm |
| TN10806BN | 100MT | 10mm | 1mm |
| TN1M12-19BN | 100MT | 12mm | 1mm |

Above part numbers are supplied as natural (white) . Additional colors are available by substituting the suffix BN with the suffix of a required color . Black(NE) Green(VE) Yellow (GL) Blue (BL)