


SS316 MINI ADJUSTABLE CHECK VALVE – SERIE SCVAM

Valvole di ritegno regolabile in SS316 - serie SCVAM

Applications

Prevents reverse flow
 Low pressure relief valve
 Locks upstream pressure

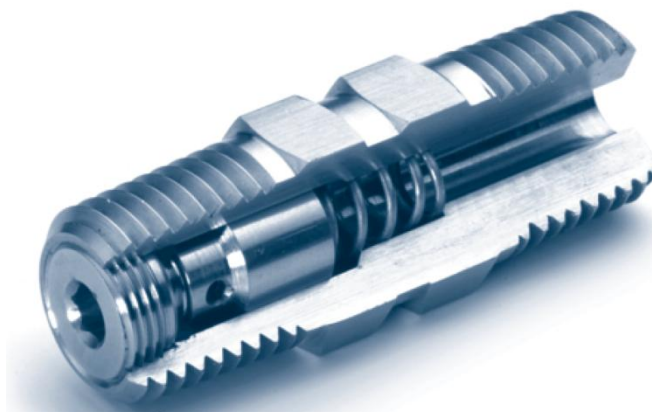


Technical specifications

Pressure range	0-6000psi
Temperature range viton	-28 to 204°C
Temperature range Buna N	-20 to 105°C
Nominal cracking pressure	3, 5, 10, 20, 40, 60, 100, 105 psi
Cv rating	0.35 for 1/4" NPT
	1.20 for 1/2" NPT

Material of construction

Body	316 stainless steel
Spring	302 stainless steel
Poppet	316 stainless steel
O-Ring	Viton (Std)
Adjusting Screw	316 stainless steel

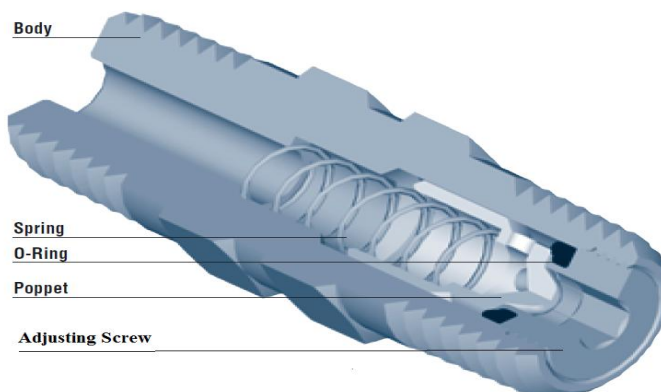

Ordering information

Part Number		End connection	
		Inlet	Outlet
SCVA	M-04N-	1/4" Male NPT	
	M-08N-	1/2" Male NPT	

our policy is one of continued research and improvment. we therefore reserve the right to amend, the specifications given in this document.